

For Air

# Hi Cupla

Universal purpose couplings for air lines

Working pressure Valve structure Applicable fluids (steel applies to air only)

Working pressure  
1.0~1.5  
1.0~1.5MPa  
(10~15kgf/cm<sup>2</sup>)



## Specifications


Body material	Steel (Chrome-plated)	Brass	Stainless steel
Size	1/8" (10 type) • 1/4" (20 type) • 3/8" (30 type) 1/2" (40 type, 400 type) • 3/4" (600 type) • 1" (800 type)		
Working pressure MPa (kgf/cm <sup>2</sup> )	1.5 (15)	1.0 (10)	1.5 (15)
Pressure resistance MPa (kgf/cm <sup>2</sup> )	2.0 (20)	1.5 (15)	2.0 (20)
Seal material Working temperature range	Seal material	Mark	Working temperature range
	Nitrile rubber	NBR (SG)	-20°C~+80°C
	Fluoro rubber	FKM (X-100)	-20°C~+180°C
			Remarks
			Standard material
			Available on request

## Max. Tightening Torque

		N·m (kgf·cm)					
Size		1/8"	1/4"	3/8"	1/2"	3/4"	1"
Torque	Steel	7 {71}	14 {143}	22 {224}	60 {612}	100 {1020}	120 {1224}
	Brass	—	9 {92}	11 {112}	30 {306}	50 {510}	65 {663}
	Stainless steel	—	14 {143}	22 {224}	60 {612}	100 {1020}	120 {1224}

## Flow Direction

Fluid must run from socket to plug.



## Interchangeability

- Sockets and plugs for Models 10 (1/8"), 17 (1/4"), 20 (1/4"), 30 (3/8") and 40 (1/2") can be connected with each other.
- Sockets and plugs for Models 400 (1/2"), 600 (3/4") and 800 (1") can be connected with each other. ① and ② can not be connected across each group.
- Interchangeable with all other Hi Cupla Series products.

## Min. Cross-Sectional Area

(mm<sup>2</sup>)

### 17, 20, 30, 40 type

Socket \ Plug	17PH	20PH	20PM-PF	30PH	30PM-PF	40PH	40PM-PF
17SH	16	16	16	16	16	16	16
20SH	16	20	20	20	20	20	20
20SM-SF	16	20	33	33	33	33	33
30SH	16	20	33	33	33	33	33
30SM-SF	16	20	33	33	33	33	33
40SH	16	20	33	33	33	33	33
40SM-SF	16	20	33	33	33	33	33

### 400, 600, 800 type


Socket \ Plug	400PH	400PM-PF	600PH	600PM-PF	800PH	800PM-PF
400SH	64	64	64	64	64	64
400SM-SF	64	94	94	94	94	94
600SH	64	94	94	94	94	94
600SM-SF	64	94	94	94	94	94
800SH	64	94	94	94	94	94
800SM-SF	64	94	94	94	94	94

## Suitability for Vacuum

Not suitable for vacuum application in either connected or disconnected condition.

## Pressure - Flow Characteristics

[Test conditions] • Fluid : Air • Temperature : Room temperature

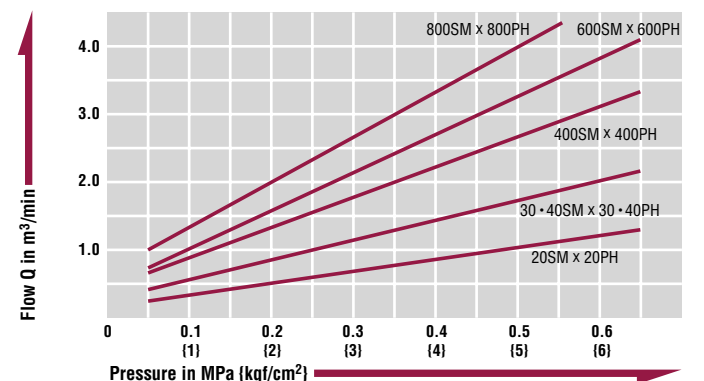


From factory air line to pneumatic tool connection, available in various body materials, sizes and connection types. Excellent durability.

- An excellent general purpose coupling for connecting factory air supply to pneumatic tools.
- Steel coupling is suitable for air. Brass or stainless steel are suitable for water. Note that fluid will come out from the plug when disconnected.
- Critical structural parts of steel models are heat-treated for increased strength giving greater durability and resistance to wear.
- Available in various body materials, sizes and end configurations applicable to a wide range of applications.


Models and Dimensions

**Plug PH type (Hose barb)**




Model	Application (Hose)	Body material•Mass (g)			Dimensions (mm)						
		Steel	Brass	Stainless steel	Lp	øHp	A	C	øT	øBp	øBd
17PH	1/4"	24	-	-	54	16	27	20	7.2	4.5	7.5
20PH	1/4"	28	30	26	57	16	30	20	9	5	7.5
30PH	3/8"	31	34	27	61	16	34	20	11.3	7.5	7.5
40PH	1/2"	53	58	47	63	20	36	20	15	7.5	7.5
400PH	1/2"	66	72	67	66	22	36	23	15	9	13
600PH	3/4"	121	132	129	77	30	45	23	21	13	13
800PH	1"	152	167	150	85	34	54	23	27	20	13

**Plug PM type (Male thread)**

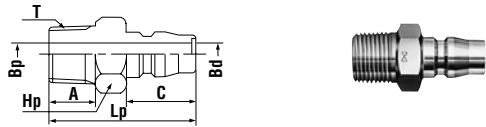


Model	Application	Body material•Mass (g)			Dimensions (mm)						
		Steel	Brass	Stainless steel	Lp	Hp(WAF)	A	C	T	øBp	øBd
10PM	Rc 1/8	22	24	-	37	Hex.14	10	20	R 1/8	4	7.5
20PM	Rc 1/4	25	28	27	41	Hex.14	13	20	R 1/4	7.5	7.5
30PM	Rc 3/8	43	48	40	42	Hex.19.3	14	20	R 3/8	7.5	7.5
40PM	Rc 1/2	59	66	62	46	Hex.22	16	20	R 1/2	12	7.5
400PM	Rc 1/2	69	77	70	50	Hex.22	16	23	R 1/2	13	13
600PM	Rc 3/4	116	126	115	55	Hex.32	18	23	R 3/4	19	13
800PM	Rc 1	152	152	198	63	Hex.35	22	23	R 1	22	13

**Plug PF type (Female thread)**

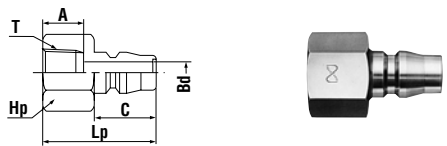


Model	Application	Body material•Mass (g)			Dimensions (mm)						
		Steel	Brass	Stainless steel	Lp	Hp(WAF)	A	C	T	øBd	
20PF	R 1/4	28	30	30	36	Hex.17	13	20	Rc 1/4	7.5	
30PF	R 3/8	39	41	41	37	Hex.21	14	20	Rc 3/8	7.5	
40PF	R 1/2	70	77	69	38	Hex.29	15	20	Rc 1/2	7.5	
400PF	R 1/2	82	89	81	41	Hex.29	15	23	Rc 1/2	13	
600PF	R 3/4	116	126	118	45	Hex.35	17	23	Rc 3/4	13	
800PF	R 1	190	202	192	54	Hex.41	22	23	Rc 1	13	

**Plug PFF type (Parallel female thread)**

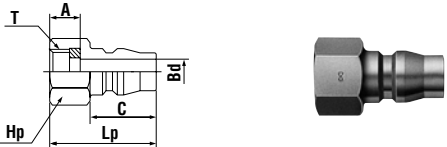


Model	Application	Body material•Mass (g)			Dimensions (mm)					
		Steel	Brass	Stainless steel	Lp	Hp(WAF)	A	C	T	øBd
20PFF	G 1/4	23	-	-	32	Hex.17	9	20	G 1/4	7.5

Application example




**Socket SH type (Hose barb)**




Model	Application (Hose)	Body material•Mass (g)			Dimensions (mm)				
		Steel	Brass	Stainless steel	Ls	øD	A	T	øBs
17SH	1/4"	99	-	-	69.5	26.5	27	7.2	4.5
20SH	1/4"	103	107	100	72.5	26.5 +1	30	9	5
30SH	3/8"	106	111	101	76.5	26.5 +1	34	11.3	7.5
40SH	1/2"	118	124	118	78.5	26.5 +1	36	15	9
400SH	1/2"	220	240	218	83	35	36	15	9
600SH	3/4"	251	273	242	92	35	45	21	14
800SH	1"	273	299	272	102	35	55	27	16

**Socket SM type (Male thread)**

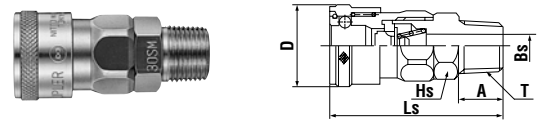

Model	Application	Body material•Mass (g)			Dimensions (mm)						
		Steel	Brass	Stainless steel	Ls	øD	Hs(WAF)	A	T	øBs	
10SM	Rc 1/8	98	-	-	52.5	26.5 +1	Hex.19	10	R 1/8	5	
20SM	Rc 1/4	101	104	96	55.5	26.5 +1	Hex.19	13	R 1/4	7	
30SM	Rc 3/8	108	119	105	56.5	26.5 +1	Hex.19	14	R 3/8	8	
40SM	Rc 1/2	131	136	120	59.5	26.5 +1	Hex.23 +2	16	R 1/2	9	
400SM	Rc 1/2	213	232	207	63	35	Hex.29	16	R 1/2	13	
600SM	Rc 3/4	260	283	241	67	35	Hex.32	19	R 3/4	16	
800SM	Rc 1	288	317	303	72	35	Hex.36	22	R 1	16	

**Socket SF type (Female thread)**

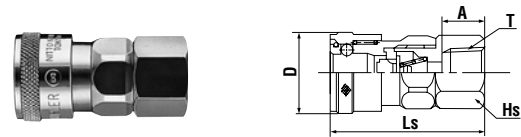

Model	Application	Body material•Mass (g)			Dimensions (mm)				
		Steel	Brass	Stainless steel	Ls	øD	Hs(WAF)	A	T
20SF	R 1/4	95	103	98	49.5	26.5 +1	Hex.19	13	Rc 1/4
30SF	R 3/8	103	105	99	50.5	26.5 +1	Hex.21	14	Rc 3/8
40SF	R 1/2	139	149	138	52.5	26.5 +1	Hex.29	15	Rc 1/2
400SF	R 1/2	216	235	216	57	35	Hex.29	15	Rc 1/2
600SF	R 3/4	260	283	258	61	35	Hex.35	17	Rc 3/4
800SF	R 1	324	353	317	68	35	Hex.41	22	Rc 1

• Above pictures are plugs and sockets of steel 20, 30 and 40 models.

\*1 : D = 25.4 for brass and stainless steel models.

\*2 : Hs = WAF 22 for brass and stainless steel models.

\*3 : Hp = WAF 17 for brass and stainless steel models.