

FLEXEEL[®] Innerbraided Straight Hose

FLEXEEL[®] is an extremely tough, lightweight, user friendly air tool hose. FLEXEEL[®] is an excellent alternative to heavy, bulky rubber hoses. The 85A durometer, ether based Polyurethane hose is reinforced with tough Dacron Polyester innerbraid.

Temperature Range: -40°F to +165°F **
Vacuum Rating: To 28" Hg.
Diameter Tolerances: 1/4" and 5/16" I.D. ± .005"
 3/8" I.D. ± .010"
Tube Markings: Freilin-Wade Specs.
Working Pressure: 4 to 1 Safety Factor

FLEXEEL[®] Advantages


- Very lightweight and easy to handle.
- The most abrasion resistant hose available.
- Very flexible and user friendly, even in subzero temperatures.
- Resistant to oils and greases.
- Non-marring to furniture and auto finishes.
- UV stabilized for long service life.
- Tough and resistant to constant flexing.



FLEXEEL[®] is ideal for roofers, nailers, staplers, furniture builders, auto assembly plants, and more. Users like its light feel and durability.


PLUG

RESIN PLUG FOR URETHANE HOSE CONNECTION (PNG)

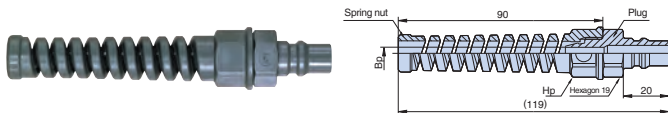

Model	Application	Weight (g)	Dimensions (mm)	
			Hp	øBp
85PNG-PLA	For ø8.5mmxø12.5mm urethane hose	16	Hexagon 22	7

RESIN PLUG FOR HOSE CONNECTION (PH)

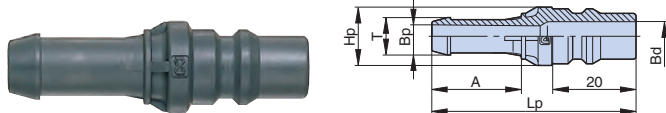

Model	Application	Weight (g)	Lp	Dimensions (mm)				
				øHp	A	øT	øBp	øBd
30PH-PLA	For 3/8" hose	4	52	16	23.5	11.5	7	7


FOR URETHANE HOSE CONNECTION (PN)



Model	Application	Weight (g)	Lp	Dimensions (mm)		
				A	øB	øT
PV-85PN	For ø8.5xø12.5 hose	78	61	19	7.5	Hex.19


SOCKET

HI CUPLA ACE FOR URETHANE HOSE CONNECTION (SNG)

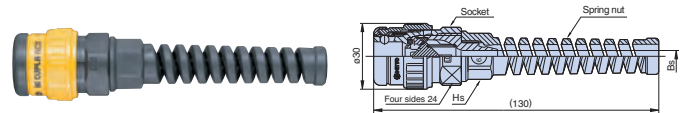

Model	Application	Weight (g)	Dimensions (mm)	
			Hs	øBs
HA-85SNG	For ø8.5mmxø12.5mm urethane hose	35	Hexagon 22	7

HI CUPLA ACE FOR HOSE CONNECTION (SH)

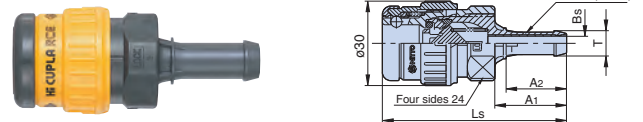

Model	Application	Weight (g)	Ls	Dimensions (mm)			
				A1	A2	øT	øBs
HA-30SH	For 3/8" hose	28	68	28	23.5	11.5	7

FOR URETHANE HOSE CONNECTION (SN)



Model	Application	Weight (g)	Ls	Dimensions (mm)				
				A	øD	øB	Hs	T
200-85SN	For ø8.5xø12.5 hose	113	66.5	19	26.5	7.5	Hex.19	Hex.19



ROTARY PLUG

- Newly developed rotary function allows 360° rotation!
- Great improvement for working pneumatic tools

NITTO Fitted Hoses

CRIMPED HOSE ASSEMBLIES

- Air/water hose with distinctive yellow & blue striping - recognised by all as one of the best quality hoses available
- Crimped Fittings - eliminates hose clamps which can leak & snag
- Available in 10, 20 & 30 metre lengths



POLYURETHANE SPIRAL HOSES

- Excellent flexibility
 - Light weight
- Super memory retention
 - Non-kinking
- Available in 2, 4, 6 and 8 metre working lengths

YOUR NITTO DISTRIBUTOR:

www.nitto-australia.com.au